Simplified Approach – Stormwater Management Worksheet


Name of Property Owner:			Date:
Name of Applicant [If different that	n owner(s)]:		
Contact Phone #:		Email Address:	
Address of Project:			
Description of Project:			
Distance from Earth Disturbance to		e water feature More than 50	
REGULATED IMPERVIOUS SU	RFACES*		
Description of Proposed Impervious Surface		nensions n X width]	Area (square feet)
(If this is less than 1,000 feet ² , Storrequired; if this is more than 2,000 Approach may not be used)			
Cumulative Total Impervious Surfa (square) feet):	ce Since Decer	nber 16, 2013	
Total Proposed Earth Disturbance A	rea (square feet):	
PROPOSED UNDERGROUND II			ZING
Proposed Impervious Area to Trench (square feet)	Proposed Dimensions		
1			
2			
Does the project involve new roof a If yes, the downspout must be confused measures to prevent clogging trap Gutter guards Cleanor	nected to the pr g by unwanted o	debris. Indicate	the measure proposed: Leaf
Signature:Printed Name:	_ Date:		

$Simplified\ Approach-Stormwater\ Management\ Checklist$

Complete the checklist below to verify all required information is shown on the plan:

Yes	No	Not Applicable	Required Information		
			Name and address of the owner of the property.		
			Name and address of individual preparing the plan (if different).		
			Date of plan preparation.		
			North arrow.		
			Location of all existing features within 50 feet of the property, including (if present): • Buildings; • Driveways;		
			• Roads;		
			Water Lines/Wells (or a note that no wells are present within 50 feet of the proposed facility);		
			Septic Systems/Sewer Mains and Laterals;		
			• Streams, Wetlands, and Floodplains		
			• Existing Stormwater Facilities; and		
			• Easements.		
			Location and approximate size in square feet of existing roof area to be captured and diverted to the BMP.		
			Location and approximate size in square feet of proposed: • Structures;		
			• Driveways; and		
			Location, orientation, and dimensions of the proposed Underground Infiltration Trench(es). Length and width must be included on the plan.		
			Distance from the proposed Underground Infiltration Trench(es) to any existing surface water features, such as: streams, lakes, ponds, wetlands, or other natural waterbodies. Must be > 50 feet from surface water features or outside of an existing legally described buffer (i.e., deed, covenants, easement, etc.) whichever is greater. Contact the Municipality if this is not possible.		
			Distance from the proposed Underground Infiltration Trench(es) to any existing septic system, public sewer line, or lateral.		
			Distance from the proposed Underground Infiltration Trench(es) to any existing wells or waterlines.		
			Distance from the proposed Underground Infiltration Trench(es) to any existing wells or waterlines.		
			Show distance from at least two existing fixed features (e.g., house, shed, driveway) to the proposed Underground Infiltration Trench(es).		
			PA One Call Serial Number (Dial 8-1-1 or 1-800-242-1776) to receive.		

				NORTH ARROW
				DATE
Underground Service Alert	PROPERTY OWN NAME: ADDRESS:	ER		-
Call: TOLL FREE 1-800-242-1776 THREE WORKING DAYS BEFORE YOU DIG	PLAN PREPARER NAME: ADDRESS:			
FOR USE BY MUNICIPAL ENGINEER		CHESTER COUNTY	PENNSYLVANIA	SHEET NO. 1
		SIMPLI	FIED	1 OF 4
		SITE PI	_AN	1017

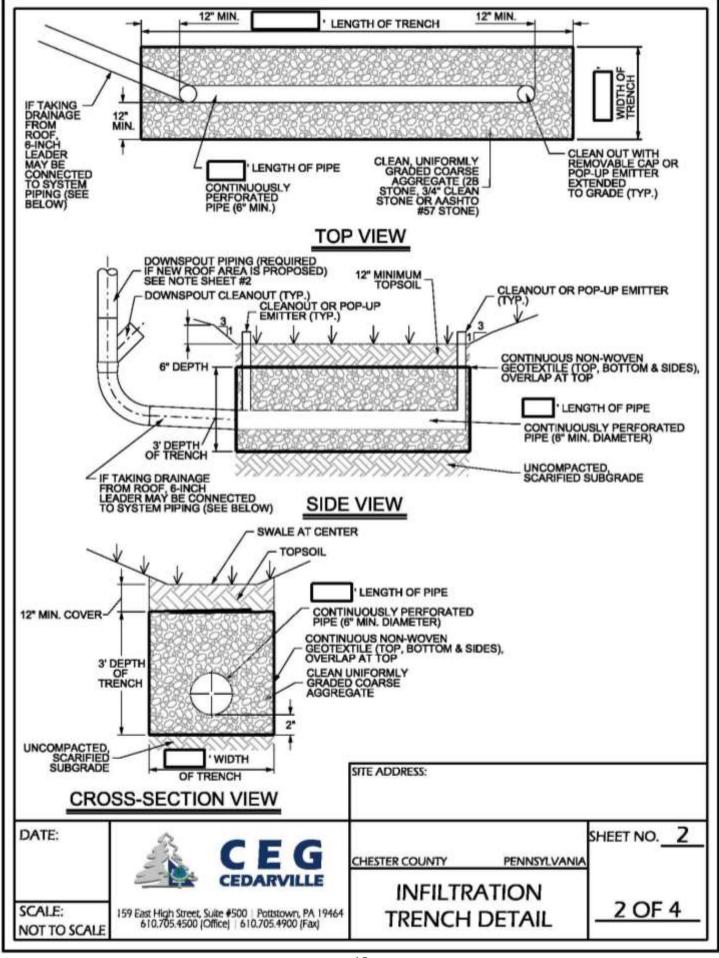

NOTES

§ 345-306.M: DURING SITE CONSTRUCTION, ALL INFILTRATION PRACTICE COMPONENTS SHALL BE PROTECTED FROM COMPACTION DUE TO HEAVY EQUIPMENT OPERATION OR STORAGE OF FILL OR CONSTRUCTION MATERIAL. INFILTRATION AREAS SHALL ALSO BE PROTECTED FROM SEDIMENTATION. AREAS THAT ARE ACCIDENTALLY COMPACTED OR GRADED SHALL BE REMEDIATED TO RESTORE SOIL COMPOSITION AND POROSITY. ADEQUATE DOCUMENTATION TO THIS EFFECT SHALL BE SUBMITTED TO THE TOWNSHIP ENGINEER FOR REVIEW. ALL AREAS DESIGNATED FOR INFILTRATION SHALL NOT RECEIVE RUNOFF UNTIL THE CONTRIBUTORY DRAINAGE AREA HAS ACHIEVED FINAL STABILIZATION.

§ 345-306.N: WHERE SEDIMENT TRANSPORT IN THE STORMWATER RUNOFF IS ANTICIPATED TO REACH THE INFILTRATION SYSTEM, APPROPRIATE PERMANENT MEASURES TO PREVENT OR COLLECT SEDIMENT SHALL BE INSTALLED PRIOR TO DISCHARGE TO THE INFILTRATION SYSTEM.

§ 345-306.O: WHERE ROOF DRAINS ARE DESIGNED TO DISCHARGE TO INFILTRATION PRACTICES, THEY SHALL HAVE APPROPRIATE MEASURES TO PREVENT CLOGGING BY UNWANTED DEBRIS (FOR EXAMPLE, SILT, LEAVES AND VEGETATION). SUCH MEASURES SHALL INCLUDE BUT ARE NOT LIMITED TO LEAF TRAPS, GUTTER GUARDS AND

§ 345-306.R: THE FOLLOWING PROCEDURES AND MATERIALS SHALL BE REQUIRED DURING THE CONSTRUCTION OF ALL INFILTRATION TRENCHES:

- EXCAVATION FOR THE INFILTRATION TRENCH SHALL BE PERFORMED WITH EQUIPMENT THAT WILL NOT COMPACT THE BOTTOM OF THE INFILTRATION TRENCH. (1)
- (2)THE BOTTOM OF THE INFILTRATION TRENCH SHALL BE SCARIFIED PRIOR TO THE PLACEMENT OF AGGREGATE.
- (3)ONLY CLEAN AGGREGATE WITH DOCUMENTED POROSITY, FREE OF FINES, SHALL BE ALLOWED.
- THE TOPS AND SIDES OF ALL INFILTRATION TRENCH SHALL BE COVERED WITH DRAINAGE FABRIC. FABRIC SHALL BE NONWOVEN FABRIC ACCEPTABLE TO THE TOWNSHIP ENGINEER. (4)
- STORMWATER SHALL BE DISTRIBUTED THROUGHOUT THE ENTIRE SEEPAGE BED/TRENCH OR LIKE FACILITY AND PROVISIONS FOR THE COLLECTION OF DEBRIS SHALL BE PROVIDED IN ALL FACILITIES. (5)
- PA ONECALL IS REQUIRED BEFORE ANY CONSTRUCTION ACTIVITIES COMMENCE. (6)

TRENCH LENGTH (1000-2000 SQUARE FEET OF REGULATED IMPERVIOUS SURFACE)

Impervious	4' Wide Trench	5' Wide Trench	6' Wide Trench	7' Wide Trench	B' Wide Trench
Surface (sf)	Length of Trench (ft)				
1000	45.75	36.50	30.50	26.25	23.00
1001-1050	46.75	37.50	31.25	26.75	23.50
1051-1100	48.00	38.50	32.00	27.50	24.00
1101-1150	49.25	39.25	32.75	28.25	24.75
1151-1200	50.25	40.25	33.50	28.75	25.25
1201-1250	54.75	44.00	36.50	31.50	27.50
1251-1300	59.50	47.50	39.75	34.00	29.75
1301-1350	61.75	49.25	41.25	35.25	71.00
1351-1400	64.00	51.25	42.75	36.50	32.00
1401-1450	66.25	53.00	44.25	38.00	33.25
1451-1500	68.50	54.75	45.75	39.25	34.25
1501-1550	70.75	56.75	47.25	40.50	35.50
1551-1600	73.00	58.50	48.75	41.75	36.50
1601-1650	75.25	60.25	50.25	43.00	37.75
1651-1700	77.75	62.25	51.75	44.50	39.00
1701-1750	80.00	64.00	53:25	45.75	40.00
1751-1800	82.25	65.75	54.75	47.00	41.25
1801-1850	84.50	67.50	56,25	48.25	42.25
1851-1900	86.75	69.50	58.00	49.75	43.50
1901-1950	89.00	71.25	59.50	51.00	44.50
1951-1999	91.25	73.00	61.00	52.75	45.75

DIMENSIONS IN THIS TABLE HAVE BEEN DETERMINED FOR MANAGING THE DIFFERENCE BETWEEN THE PRE-DEVELOPMENT AND POST-DEVELOPMENT, 2-YEAR FREQUENCY, 24-HOUR DURATION RAINFALL RUNOFF VOLUME

TRENCH SHOULD BE SIZED BASED ON SQUARE FEET OF ROOF AREA DIRECTED TO THE PROPOSED TRENCH, WHICH MAY NOT EQUAL THE REGULATED IMPERVIOUS SURFACE PROPOSED.

SITE ADDRESS:

DATE:



CHESTER COUNTY

PENNSYLVANIA

INFILTRATION TRENCH NOTES

3C OF 4

SHEET NO. 3C

SCALE: NOT TO SCALE 159 East High Street, Suite #500 | Pottstown, PA 19464 610.705.4500 (Office) | 610.705.4900 (Fax)

STORMWATER FACILITIES OPERATIONS AND MAINTENANCE PLAN

THE HOMEOWNER WILL BE RESPONSIBLE FOR THE OPERATION AND MAINTENANCE OF ALL STORMWATER AND BMP FACILITIES. THE FACILITIES WILL INCLUDE THE INFILTRATION TRENCH ON THE PROPERTY AS WELL AS ANY YARD OR ROOF DRAINS, PIPING, POP-UP EMITTERS OR CLEAN-OUTS SHOWN ON THIS PLAN.

MAINTENANCE AND OPERATION WILL BE AS FOLLOWS:

- THE INFILTRATION TRENCH AND CONVEYANCES DESCRIBED IN THIS PLAN SHALL BE INSPECTED
 ANNUALLY OR AS NEEDED FOLLOWING SIGNIFICANT PRECIPITATION EVENTS TO ASCERTAIN IF ANY
 SEDIMENT IS ENTERING THE FACILITIES. THE INFILTRATION TRENCH AND CONVEYANCES DESCRIBED IN
 THIS PLAN SHALL BE CLEANED IF NECESSARY. CLEANING WILL CONSIST OF REMOVING THE
 ACCUMULATED SILT, DEBRIS, OR SEDIMENT.
- THE OVERLYING VEGETATION ON THE INFILTRATION TRENCH SHALL BE MAINTAINED IN GOOD CONDITION, AND ANY BARE SPOTS RE-VEGETATED AS SOON AS POSSIBLE.
- VEHICULAR ACCESS ON THE INFILTRATION TRENCH SHOULD BE PROHIBITED, AND CARE SHOULD BE TAKEN TO AVOID EXCESSIVE COMPACTION BY MOWERS.
- REPAIR ALL DAMAGED PIPING, CLEAN-OUTS, AND POP-UP EMITTERS PROMPTLY TO PREVENT SEDIMENT FROM ENTERING THE SYSTEM. SPECIAL CARE SHOULD BE TAKEN TO AVOID DAMAGING EXPOSED ELEMENTS WITH MOWERS AND/OR STRING TRIMMERS.
- GRASSES OVER THE INFILTRATION TRENCH SHALL BE MOWED AT LEAST TWICE EACH YEAR. TREES AND SHRUBS SHOULD NOT BE PERMITTED TO GROW ABOVE THE INFILTRATION TRENCH.

		SITE ADDRESS:		
DATE:	A CEG	CHESTER COUNTY PENNSYLVANIA	SHEET NO. 4	
	CEDARVILLE	INFILTRATION TRENCH		
SCALE: NOT TO SCALE	159 East High Street, Suite #500 Pottstown, PA 19464 610,705,4500 (Office) 610,705,4900 (Fax)	OPERATION & MAINTENANCE NOTES	4 OF 4	